

130 S. Second St.
Chowchilla, CA 93610
559-665-8615 – 559-665-7419 fax

Swimming Pool Permit Application

Application Date: _____ Project Valuation \$: _____

Applicant: _____ Applicant Phone: _____

Job Site Address: _____

Owner Name: _____ Owner Phone: _____

Owner Mailing Address: _____

Parcel Number: _____ Zoning: _____ Tract: _____ Lot: _____

Work Description: _____

Commercial ☐ Residential ☐ Swimming Pool ☐ Spa ☐

Gallons: _____ Heater: Yes ☐ No ☐ BTU _____

Building Contractor: _____

Address: _____

Phone: _____ State License Number: _____

Plumbing Contractor: _____

Address: _____

Phone: _____ State License Number: _____

Electric Contractor: _____

Address: _____

Phone: _____ State License Number: _____

Mechanical Contractor: _____



Address: _____

Phone: _____ State License Number: _____

Architect or Engineer: _____

Address: _____

Phone: _____ State License Number: _____

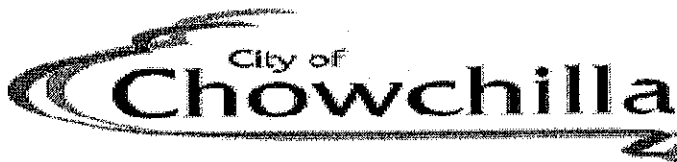

130 S. Second St.
Chowchilla, CA 93610
559-665-8615 – 559-665-7419 fax

**Community Economic Development Department
Building Division**

Pool Permit Instructions

Applicant to provide:

1. Two (2) sets of engineered reinforcement steel plans for pool STAMPED AND SIGNED BY THE ENGINEER.
2. A City of Chowchilla plot plan form, complete with applicant information and plot plan.
3. A City of Chowchilla "Swimming Pool Safety Act" compliance form completed by the applicant, showing the methods and equipment used to comply with the Swimming Pool Safety Act.
4. Assessor's Parcel Number (APN) and address.
5. Valuation of Pool Project.
6. Scale drawing of pool for Assessor's Office
7. Pool size and Gallons
8. If pool is being built in the Greenhills area you will also need a permission letter for the Architecture Review Committee (ARC).

Fees:

Plan check fee, building permit fee, plumbing, electrical and mechanical are calculated per valuation.

A refundable cash bond of \$500.00 will also be charged per building permit.

If you have any questions please contact the Community Development Department at (559) 665-8615 Ext.787.

City of Chowchilla

Pool inspections

First Inspection – Pre-Gunite:

Reinforcement

- ✓ Reinforcement steel sizing
- ✓ Reinforcement steel spacing
- ✓ Clearance of reinforcement steel to soil
- ✓ Ties of Reinforcement steel

Electrical Bonding

- ✓ # 8 copper conductor, clamped to steel reinforcement run to equipment area
- ✓ Pool light bonded with #8 copper to steel reinforcement
- ✓ Diving board jig to reinforcement steel

Rough Plumbing

- ✓ PVC pipe sizing
- ✓ Depth of pipe burial
- ✓ 35 psi test
- ✓ Water filler pipe to water service at home, 12" deep in trench

Second Inspection or combine with First:

- ✓ Rough Electrical
- ✓ Electrical wiring from equipment area to service panel. If not covered by concrete deck, 18" or cover on PVC electric conduit, 6" of cover over rigid and 18" over EMT unless subject to vehicular traffic.
- ✓ Gas line to pool heater or spa heater, 10 psi test, proper burial depth

Third Inspection-Pre-Deck:

- ✓ Deck forms in place and graded for inspection
- ✓ Water pipes to have 12" of cover, if not under decking

Swimming Pool Safety Act Compliance Inspection

(Maybe combined with any previous inspection, must be performed before plastering of pool starts)

Final Inspection – Pre-Plaster:

- ✓ Fences, gates, alarms, doors, etc. to be inspected before plastering of pool starts.
- ✓ Electrical Complete / Motors working

3105.2 Definition. The following term shall, for the purposes of this section and as used elsewhere in this code, have the meaning shown herein.

RETRACTABLE AWNING. A retractable *awning* is a cover with a frame that retracts against a building or other structure to which it is entirely supported.

3105.3 Design and construction. *Awnings* and canopies shall be designed and constructed to withstand wind or other lateral loads and live loads as required by Chapter 16 with due allowance for shape, open construction and similar features that relieve the pressures or loads. Structural members shall be protected to prevent deterioration. *Awnings* shall have frames of noncombustible material, *fire-retardant-treated wood*, wood of Type IV size, or 1-hour construction with combustible or noncombustible covers and shall be either fixed, retractable, folding or collapsible.

3105.4 Canopy materials. Canopies shall be constructed of a rigid framework with an *approved* covering that meets the fire propagation performance criteria of NFPA 701 or has a *flame spread index* not greater than 25 when tested in accordance with ASTM E 84 or UL 723. *All fabrics and all interior decorative fabrics or materials shall be flame resistant in accordance with appropriate standards set forth in CCR, Title 19, Division 1, Chapter 8. Tops and sidewalls shall be made either from fabric which has been flame resistant treated with an approved exterior chemical process by an approved application concern, or from inherently flame resistant fabric approved and listed by the State Fire Marshal (see CCR, Title 19, Division 1, Chapter 8).*

SECTION 3106 MARQUEES

3106.1 General. Marquees shall comply with this section and other applicable sections of this code.

3106.2 Thickness. The maximum height or thickness of a marquee measured vertically from its lowest to its highest point shall not exceed 3 feet (914 mm) where the marquee projects more than two-thirds of the distance from the property line to the curb line, and shall not exceed 9 feet (2743 mm) where the marquee is less than two-thirds of the distance from the property line to the curb line.

3106.3 Roof construction. Where the roof or any part thereof is a skylight, the skylight shall comply with the requirements of Chapter 24. Every roof and skylight of a marquee shall be sloped to downspouts that shall conduct any drainage from the marquee in such a manner so as not to spill over the sidewalk.

3106.4 Location prohibited. Every marquee shall be so located as not to interfere with the operation of any exterior standpipe, and such that the marquee does not obstruct the clear passage of *stairways* or *exit discharge* from the building or the installation or maintenance of street lighting.

3106.5 Construction. A marquee shall be supported entirely from the building and constructed of noncombustible materials. Marquees shall be designed as required in Chapter 16. Structural members shall be protected to prevent deterioration.

SECTION 3107 SIGNS

3107.1 General. Signs shall be designed, constructed and maintained in accordance with this code.

SECTION 3108 TELECOMMUNICATION AND BROADCAST TOWERS

3108.1 General. Towers shall be designed and constructed in accordance with the provisions of TIA-222.

Exception: Single free-standing poles used to support antennas not greater than 75 feet (22 860 mm), measured from the top of the pole to grade, shall not be required to be noncombustible.

3108.2 Location and access. Towers shall be located such that guy wires and other accessories shall not cross or encroach upon any street or other public space, or over above-ground electric utility lines, or encroach upon any privately owned property without the written consent of the owner of the encroached-upon property, space or above-ground electric utility lines. Towers shall be equipped with climbing and working facilities in compliance with TIA-222. Access to the tower sites shall be limited as required by applicable OSHA, FCC and EPA regulations.

SECTION 3109 SWIMMING POOL ENCLOSURES AND SAFETY DEVICES

3109.1 General. Swimming pools shall comply with the requirements of this section and other applicable sections of this code.

3109.2 Definition. The following word and term shall, for the purposes of this section and as used elsewhere in this code, have the meaning shown herein.

SWIMMING POOLS. Any structure intended for swimming, recreational bathing or wading that contains water over 24 inches (610 mm) deep. This includes in-ground, above-ground and on-ground pools; hot tubs; spas and fixed-in-place wading pools.

3109.3 Public swimming pools. Public swimming pools shall be completely enclosed by a fence at least 4 feet (1290 mm) in height or a screen enclosure. Openings in the fence shall not *permit* the passage of a 4-inch-diameter (102 mm) sphere. The fence or screen enclosure shall be equipped with self-closing and self-latching gates.

3109.4 Residential swimming pools. Residential swimming pools shall comply with Sections 3109.4.1 through 3109.4.3.

Exception: A swimming pool with a power safety cover or a spa with a safety cover complying with ASTM F 1346.

3109.4.1 Barrier height and clearances. The top of the barrier shall be at least 48 inches (1219 mm) above grade measured on the side of the barrier that faces away from the swimming pool. The maximum vertical clearance between grade and the bottom of the barrier shall be 2 inches (51 mm) measured on the side of the barrier that faces away from the swimming pool. Where the top of the pool structure is above grade, the barrier is authorized to be at ground level or mounted on top of the pool structure, and the maximum vertical clearance between the top of the pool structure and the bottom of the barrier shall be 4 inches (102 mm).

3109.4.1.1 Openings. Openings in the barrier shall not allow passage of a 4-inch-diameter (102 mm) sphere.

3109.4.1.2 Solid barrier surfaces. Solid barriers which do not have openings shall not contain indentations or protrusions except for normal construction tolerances and tooled masonry joints.

3109.4.1.3 Closely spaced horizontal members. Where the barrier is composed of horizontal and vertical members and the distance between the tops of the horizontal members is less than 45 inches (1143 mm), the horizontal members shall be located on the swimming pool side of the fence. Spacing between vertical members shall not exceed $1\frac{3}{4}$ inches (44 mm) in width. Where there are decorative cutouts within vertical members, spacing within the cutouts shall not exceed $1\frac{3}{4}$ inches (44 mm) in width.

3109.4.1.4 Widely spaced horizontal members. Where the barrier is composed of horizontal and vertical members and the distance between the tops of the horizontal members is 45 inches (1143 mm) or more, spacing between vertical members shall not exceed 4 inches (102 mm). Where there are decorative cutouts within vertical members, spacing within the cutouts shall not exceed $1\frac{3}{4}$ inches (44 mm) in width.

3109.4.1.5 Chain link dimensions. Maximum mesh size for chain link fences shall be a $2\frac{1}{4}$ inch square (57 mm square) unless the fence is provided with slats fastened at the top or the bottom which reduce the openings to no more than $1\frac{3}{4}$ inches (44 mm).

3109.4.1.6 Diagonal members. Where the barrier is composed of diagonal members, the maximum opening formed by the diagonal members shall be no more than $1\frac{3}{4}$ inches (44 mm).

3109.4.1.7 Gates. Access doors or gates shall comply with the requirements of Sections 3109.4.1.1 through 3109.4.1.6 and shall be equipped to accommodate a locking device. Pedestrian access doors or gates shall open outward away from the pool and shall be self-closing and have a self-latching device. Doors or gates other than pedestrian access doors or gates shall have a self-latching device. Release mechanisms shall be in

accordance with Sections 1008.1.9 and 1109.12. Where the release mechanism of the self-latching device is located less than 54 inches (1372 mm) from the bottom of the door or gate, the release mechanism shall be located on the pool side of the door or gate at least 3 inches (76 mm) below the top of the door or gate, and the door or gate and barrier shall have no opening greater than $\frac{1}{2}$ inch (12.7 mm) within 18 inches (457 mm) of the release mechanism.

3109.4.1.8 Dwelling wall as a barrier. Where a wall of a dwelling serves as part of the barrier, one of the following shall apply:

1. Doors with direct access to the pool through that wall shall be equipped with an alarm that produces an audible warning when the door and/or its screen, if present, are opened. The alarm shall be *listed* and labeled in accordance with UL 2017. In dwellings not required to be *Accessible units, Type A units* or *Type B units*, the deactivation switch shall be located 54 inches (1372 mm) or more above the threshold of the door. In dwellings required to be *Accessible units, Type A units* or *Type B units*, the deactivation switch(es) shall be located at 54 inches (1372 mm) maximum and 48 inches (1219 mm) minimum above the threshold of the door.
2. The pool shall be equipped with a power safety cover that complies with ASTM F 1346.
3. Other means of protection, such as self-closing doors with self-latching devices, which are *approved*, shall be accepted so long as the degree of protection afforded is not less than the protection afforded by Section 3109.4.1.8, Item 1 or 2.

3109.4.1.9 Pool structure as barrier. Where an above-ground pool structure is used as a barrier or where the barrier is mounted on top of the pool structure, and the means of access is a ladder or steps, then the ladder or steps either shall be capable of being secured, locked or removed to prevent access, or the ladder or steps shall be surrounded by a barrier which meets the requirements of Sections 3109.4.1.1 through 3109.4.1.8. When the ladder or steps are secured, locked or removed, any opening created shall not allow the passage of a 4-inch-diameter (102 mm) sphere.

3109.4.2 Indoor swimming pools. Walls surrounding indoor swimming pools shall not be required to comply with Section 3109.4.1.8.

3109.4.3 Prohibited locations. Barriers shall be located so as to prohibit permanent structures, equipment or similar objects from being used to climb the barriers.

3109.4.4 Private swimming pools (statewide). *These regulations are subject to local government modification. The applicable local government requirements at the time of application for a building permit should be verified. These standards become applicable commencing January 1, 1998, to a private, single-family home for which a construction permit for a new swimming pool has been issued on or after January 1, 1998.*

3109.4.4.1 Definitions. As used in this division, the following terms have the following meanings:

APPROVED SAFETY POOL COVER means a manually or power-operated safety pool cover that meets all of the performance standards of the American Society for Testing and Materials (ASTM), in compliance with Standard F 1346-91.

ENCLOSURE means a fence, wall or other barrier that isolates a swimming pool from access to the home.

EXIT ALARMS means devices that make audible, continuous alarm sounds when any door or window that permits access from the residence to the pool area, that is without any intervening enclosure, is opened or is left ajar. Exit alarms may be battery operated or may be connected to the electrical wiring of the building.

PUBLIC SWIMMING POOL means a swimming pool operated for the use of the general public with or without charge, or for the use of the members and guests of a private club. Public swimming pool does not include a swimming pool located on the grounds of a private single-family home.

SWIMMING POOL or **POOL** means any structure intended for swimming or recreational bathing that contains water over 18 inches (457 mm) deep. Swimming pool includes in-ground and above-ground structures and includes, but is not limited to, hot tubs, spas, portable spas and nonportable wading pools.

Authority: Health and Safety Code Section 18942(b)
Reference: Health and Safety Code Section 115921
Ab 3305, Statutes 1996, C.925

3109.4.4.2 Construction permit; safety features required. Commencing January 1, 2007, except as provided in Section 3109.4.4.5, whenever a building permit is issued for construction of a new swimming pool or spa, or any building permit is issued for remodeling of an existing pool or spa, at a private, single-family home, it shall be equipped with at least one of the following seven drowning prevention safety features:

1. The pool shall be isolated from access to a home by an enclosure that meets the requirements of Section 3109.4.4.3.
2. The pool shall incorporate removable mesh pool fencing that meets American Society for Testing and Materials (ASTM) Specifications F 2286 standards in conjunction with a gate that is self-closing and self-latching and can accommodate a key lockable device.
3. The pool shall be equipped with an approved safety pool cover that meets all requirements of the ASTM Specifications F 1346.
4. The residence shall be equipped with exit alarms on those doors providing direct access to the pool.
5. All doors providing direct access from the home to the swimming pool shall be equipped with a self-closing, self-latching device with a release

mechanism placed no lower than 54 inches (1372 mm) above the floor.

6. Swimming pool alarms that, when placed in pools, will sound upon detection of accidental or unauthorized entrance into the water. These pool alarms shall meet and be independently certified to the ASTM Standard F 2208 "Standards Specification for Pool Alarms" which includes surface motion, pressure, sonar, laser and infrared type alarms. For purposes of this article, "swimming pool alarms" shall not include swimming protection alarm devices designed for individual use, such as an alarm attached to a child that sounds when the child exceeds a certain distance or becomes submerged in water.
7. Other means of protection, if the degree of protection afforded is equal to or greater than that afforded by any of the devices set forth in items 1-4, and have been independently verified by an approved testing laboratory as meeting standards for those devices established by the ASTM or the American Society of Testing Mechanical Engineers (ASME).

Prior to the issuance of any final approval for the completion of permitted construction or remodeling work, the local building code official shall inspect the drowning safety prevention devices required by this act and if no violations are found, shall give final approval.

Authority: Health and Safety Code Section 18942(b)
Reference: Health and Safety Code Section 115922
AB 3305 (Statutes 1996, c.925); AB 2977 (Statutes 2006, c.926); AB 382 (Statutes 2007, c.XXX)

3109.4.4.3 Enclosure; required characteristics. An enclosure shall have all of the following characteristics:

1. Any access gates through the enclosure open away from the swimming pool and are self-closing with a self-latching device placed no lower than 60 inches (1524 mm) above the ground.
2. A minimum height of 60 inches (1524 mm).
3. A maximum vertical clearance from the ground to the bottom of the enclosure of 2 inches (51 mm).
4. Gaps or voids, if any, do not allow passage of a sphere equal to or greater than 4 inches (102 mm) in diameter.
5. An outside surface free of protrusions, cavities or other physical characteristics that would serve as handholds or footholds that could enable a child below the age of five years to climb over.

Authority: Health and Safety Code Section 18942(b)
Reference: Health and Safety Code Section 115923
Ab 3305, Statutes 1996, C.925

3109.4.4.4 Agreements to build; notice of provisions. Any person entering into an agreement to build a swimming pool or spa, or to engage in permitted work on a

pool or spa covered by this article, shall give the consumer notice of the requirements of this article.

Pursuant to existing law, the Department of Health Services shall have available on the department's web site, commencing January 1, 2007, approved pool safety information available for consumers to download. Pool contractors are encouraged to share this information with consumers regarding the potential dangers a pool or spa poses toddlers. Additionally, pool contractors may provide the consumer with swimming pool safety materials produced from organizations such as the United States Consumer Product Safety Commission, Drowning Prevention Foundation, California Coalition for Children's Safety & Health, Safe Kids Worldwide, Association of Pool and Spa Professionals, or the American Academy of Pediatrics.

Authority: Health and Safety Code Section 18942(b)
Reference: Health and Safety Code Section 115926
AB 3305 (Statutes 1996, c.925); AB 2977 (Statutes 2006, c.926); AB 382 (Statutes 2007, c.XXX)

3109.4.4.5 Exempt facilities. The requirements of this article shall not apply to any of the following:

1. Public swimming pools.
2. Hot tubs or spas with locking safety covers that comply with the American Society for Testing Materials Emergency Performance Specification (ASTM ES 13-89).
3. Any pool within the jurisdiction of any political subdivision that adopts an ordinance for swimming pool safety that includes requirements that are at least as stringent as this division.
4. An apartment complex or any residential setting other than a single-family home.

Authority: Health and Safety Code Section 18942(b)
Reference: Health and Safety Code Section 115925
Ab 3305, (Statutes 1996, c.925); AB 2977 (Statutes 2006, c.926); AB 382 (Statutes 2007, c.XXX)

3109.4.4.6 Application to facilities regulated by Department of Social Services. This division does not apply to any facility regulated by the State Department of Social Services even if the facility is also used as a private residence of the operator. Pool safety in those facilities shall be regulated pursuant to regulations adopted therefor by the State Department of Social Services.

Authority: Health and Safety Code Section 18942(b)
Reference: Health and Safety Code Section 115926
Ab 3305, Statutes 1996, c.925); AB 2977 (Statutes 2006, c.926); AB 382 (Statutes 2007, c.XXX)

3109.4.4.7 Modification and interpretation of division. Notwithstanding any other provision of law, this article shall not be subject to further modification or interpretation by any regulatory agency of the state, this authority being reserved exclusively to local jurisdictions, as pro-

vided for in Item 5 of Section 3109.4.4.2 and Item 3 of Section 3109.4.4.5.

Authority: Health and Safety Code Section 18942(b)
Reference: Health and Safety Code Section 115927
AB 3305 (Statutes 1996, c.925); AB 2977 (Statutes 2006, c.926); AB 382 (Statutes 2007, c.XXX)

3109.4.4.8 Construction requirements for building a pool or spa. Whenever a building permit is issued for the construction a new swimming pool or spa, the pool or spa shall meet all of the following requirements:

1. The suction outlet of the pool or spa for which the permit is issued shall be equipped to provide circulation throughout the pool or spa as prescribed in Paragraph 2.
2. The swimming pool or spa shall have at least two circulation drains per pump that shall be hydraulically balanced and symmetrically plumbed through one or more "T" fittings, and that are separated by a distance of at least three feet in any dimension between the drains. Suction outlets that are less than 12 inches across shall be covered with antientrapment grates, as specified in the ASME/ANSI Standard A 112.19.8, that cannot be removed except with the use of tools. Slots of openings in the grates or similar protective devices shall be of a shape, area and arrangement that would prevent physical entrapment and would pose any suction hazard to bathers.
3. Any backup safety system that an owner of a new swimming pools or spa may choose to install in addition to the requirements set forth in subdivisions (1) and (2) shall meet the standards as published in the document, "Guidelines for Entrapment Hazards: Making Pools and Spas Safer," Publication Number 363, March 2005, United States Consumer Products Safety Commission.
4. Whenever a building permit is for the remodel or modification of any existing swimming pool, toddler pool or spa, the permit shall require that the suction outlet of the existing swimming pool, toddler pool or spa be upgraded so as to be equipped with an antientrapment cover meeting current standards of the American Society for Testing and Materials (ASTM) or the American Society of Mechanical Engineers (ASME).

Authority: Health and Safety Code Section 18942(b)
Reference: Health and Safety Code Section 115928 AB 3305 (Statutes 1996, c.925); AB 2977 (Statutes 2006, c.926); AB 382 (Statutes 2007, c.XXX)

3109.5 Entrapment avoidance. Suction outlets shall be designed and installed in accordance with ANSI/APSP-7.