

WILLINGBORO



TOWNSHIP

NEW JERSEY

Application for Street Opening

Name of Applicant

Location of Opening

Applicants' Address (Include Street, city, state, zip code)

Applicant's Phone Number

Applicant's Email Address

Hereby applies for permission to make an opening for:

☐ Sanitary Sewer ☐ Storm Sewer

☐ Gas Line ☐ Telephone

☐ Water Line ☐ Electrical

☐ Cable ☐ Other: _____

Applicant is:

☐ Owner ☐ Public Utility

☐ Contractor ☐ Tenant

Sketch to be provided on Sheet 2 of Permit (Include north arrow and nearest cross-street):

Indicate type of opening(s) and dimensions:

TYPE	MATERIAL	LENGTH (FT)	WIDTH (FT)	AREA (S.F)	AREA (S.Y)
STREET					
CURB					
OTHER:					

Before opening a roadway, you must contact NJ One-Call Service (800) 272-1000 for utility location and report the opening to the Willingboro Inspections Department (609)-877-2200 x1214.

I hereby agree to and will comply with Chapter 328: Streets and Sidewalks, Article II, of the Township of Willingboro Code; will maintain the required certificate of insurance (328-15) and indemnify the Township concerning any loss of person(s) or property (328-16).

Applicant Signature

Date

Township Engineer

Date

Department Use Only:

Application Fee	\$50.00	Check #	Receipt #	Date:
Engineering Fee	\$500.00	Check #	Receipt #	Date:
Escrow Fee	\$500.00 (Minimum)	Check #	Receipt #	Date:

Distribution: Permit, File, Police Department, Fire Department

(STREET NAME)

(STREET NAME)

(STREET NAME)

(STREET NAME)

W=

1

2

1

2

1

2

INDICATE CURB TYPE

☐ VERTICAL CURB

☐ ROLLED CURB & GUTTER

☐ VERTICAL CURB & GUTTER

CONCRETE SIDEWALK

☐ YES


☐ NO

CONCRETE DRIVEWAY

☐ YES


☐ NO

PAGE 2 OF 2

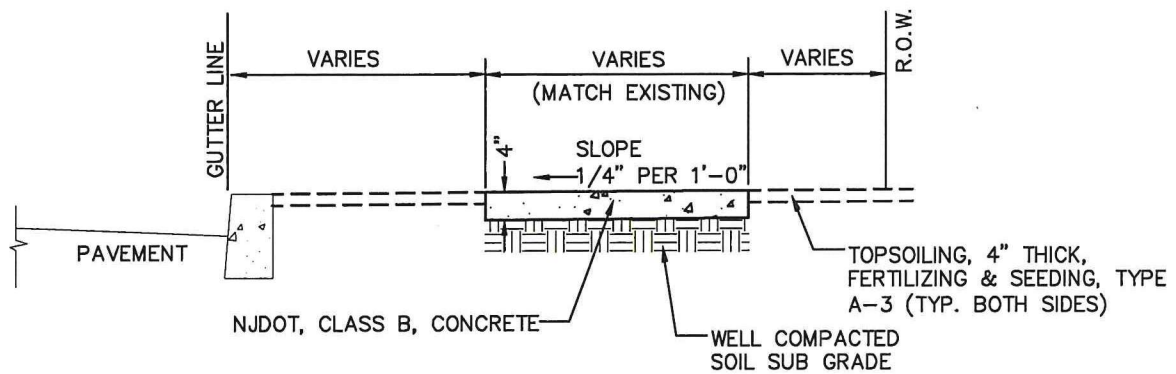


CONCRETE SIDEWALK, 4" THICK

N.T.S.

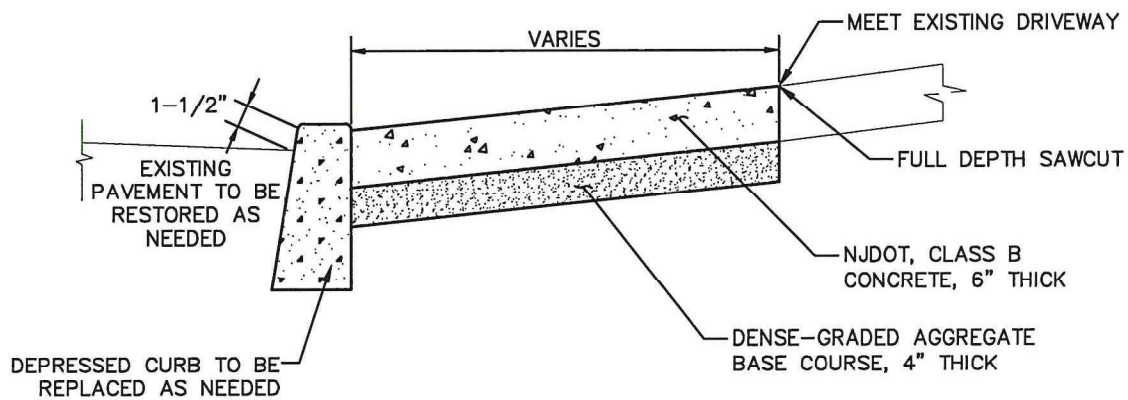

CONCRETE DRIVEWAY, 6" THICK

N.T.S.

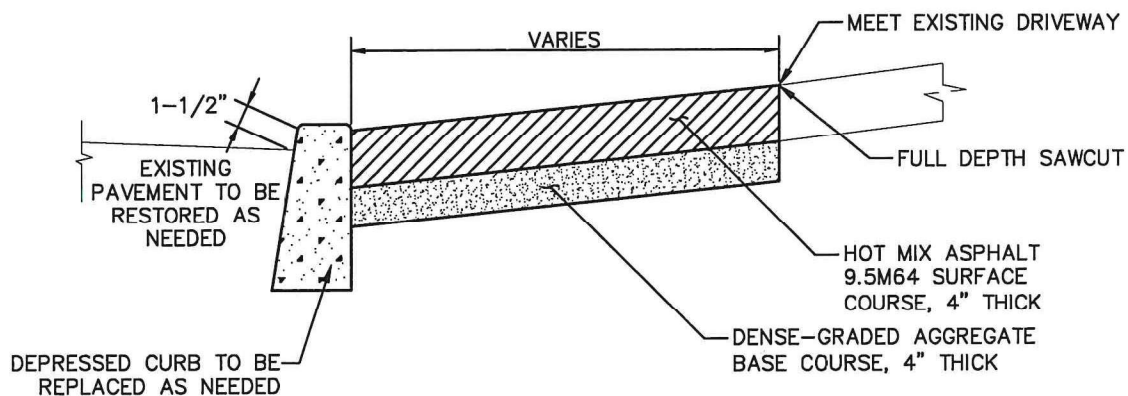


BITUMINOUS CONCRETE DRIVEWAY, 4" THICK

N.T.S.


NOTES:

1. ALL GRASSED AREAS DISTURBED DURING CONSTRUCTION SHALL BE TOPSOILED AND SEEDDED.

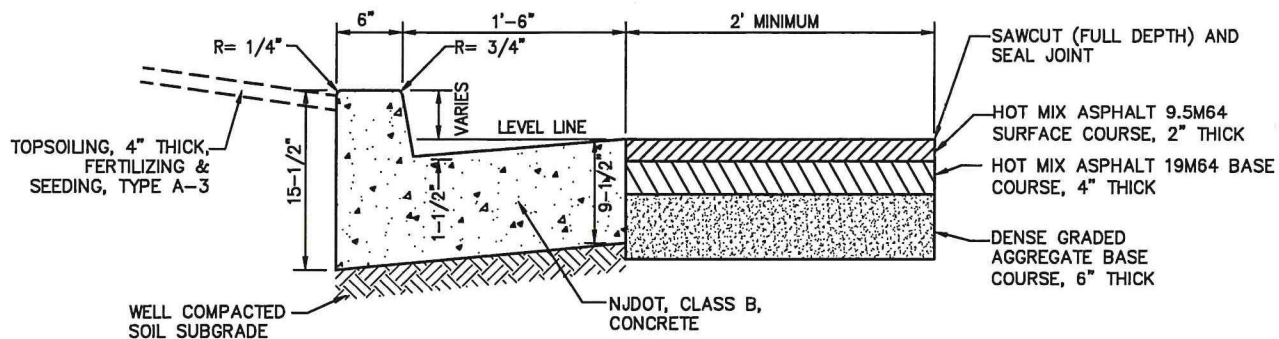


MONOLITHIC CONCRETE "VERTICAL" CURB & GUTTER WITH PAVEMENT RESTORATION

N.T.S.

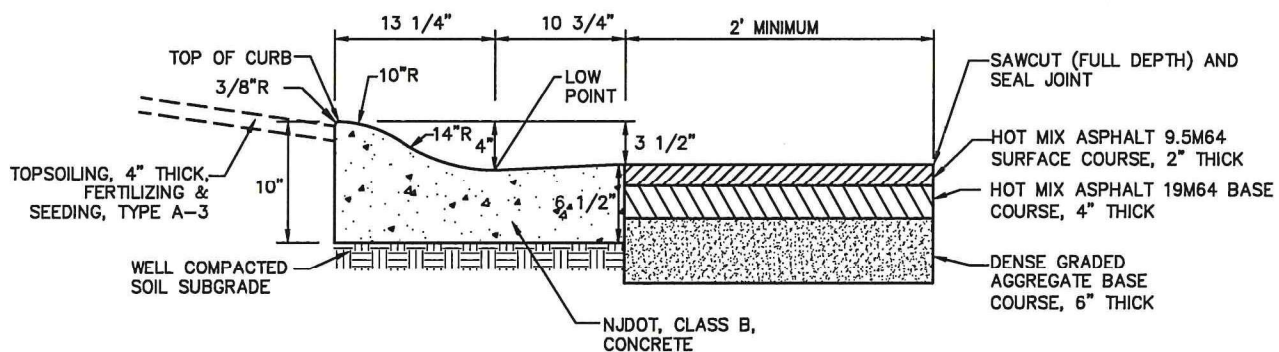

MONOLITHIC CONCRETE "ROLLED" CURB & GUTTER WITH PAVEMENT RESTORATION

N.T.S.

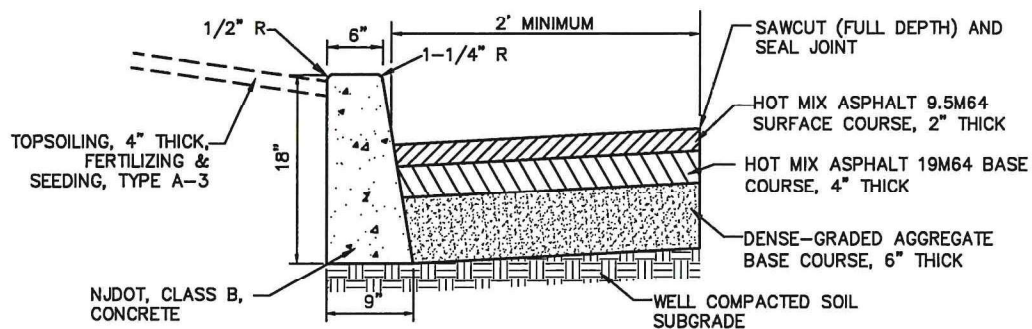


6"X9"X18" CONCRETE VERTICAL CURB WITH PAVEMENT RESTORATION

N.T.S.

NOTES:

1. EXPANSION JOINTS 1/2" WIDE SHALL BE INSTALLED IN THE CURB 10' APART AND FILLED WITH CELLULAR COMPRESSION MATERIAL AS SPECIFIED, AND RECESSED 1/4" FROM FACE AND TOP OF CURB.
2. FOR CONTINUOUS POURED CAST-IN-PLACE CURBING, EXPANSION JOINTS EVERY 50' AND CONTRACTION JOINTS MUST BE MACHINE CUT 2" DEEP ON FRONT, TOP AND REAR OF CURB WITHIN 18 HOURS OF INITIAL CURB POUR @ 10' SPACING.
3. ALL GRASSED AREAS DISTURBED DURING CONSTRUCTION SHALL BE TOPSOILED AND SEEDDED.

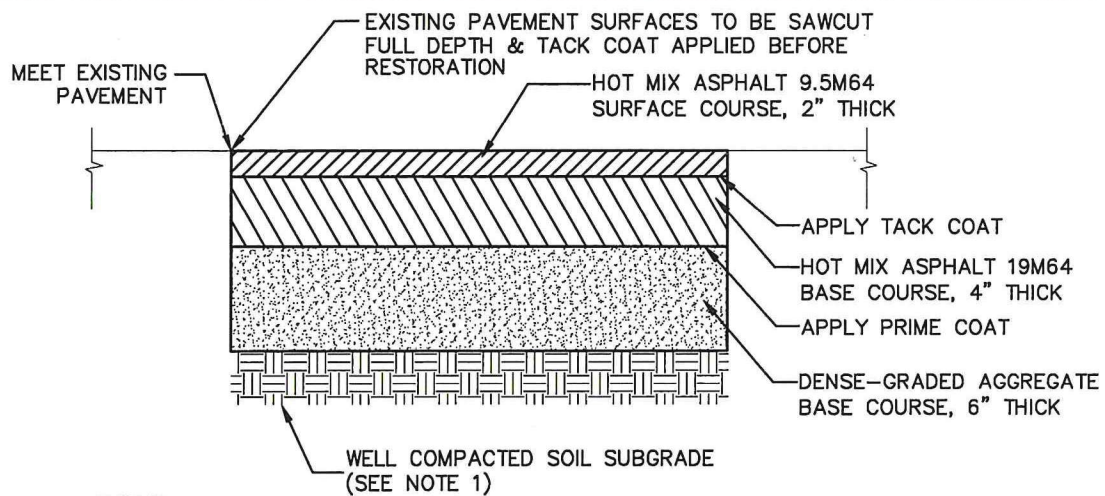


NOTES:

1. FILL BELOW PAVEMENT SUBBASE SHALL BE GRANULAR AND MEET NJDOT DESIGNATION I-13, AS NECESSARY TO OBTAIN PROPER COMPACTION.
2. OPENINGS IN NEWLY CONSTRUCTED OR SUBSTANTIALLY IMPROVED ROADS SHALL RECEIVE AN INFRARED TREATMENT AS PER ORDINANCE SECTION 328-10(b)(i).

STANDARD HOT MIX ASPHALT PAVEMENT RESTORATION FOR OPENINGS

N.T.S.

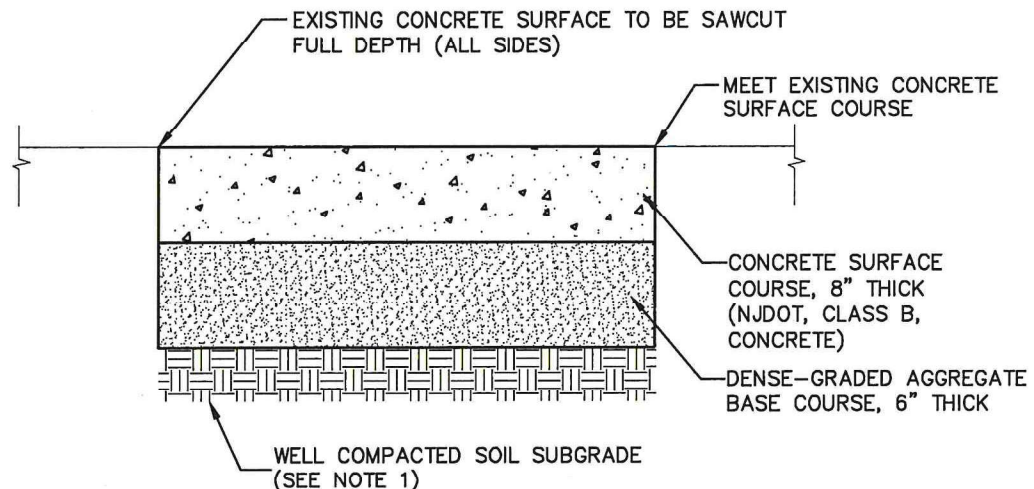


NOTES:

1. FILL BELOW PAVEMENT SUBBASE SHALL BE GRANULAR AND MEET NJDOT DESIGNATION I-13, AS NECESSARY TO OBTAIN PROPER COMPACTION.

STANDARD CONCRETE PAVEMENT RESTORATION FOR OPENINGS

N.T.S.

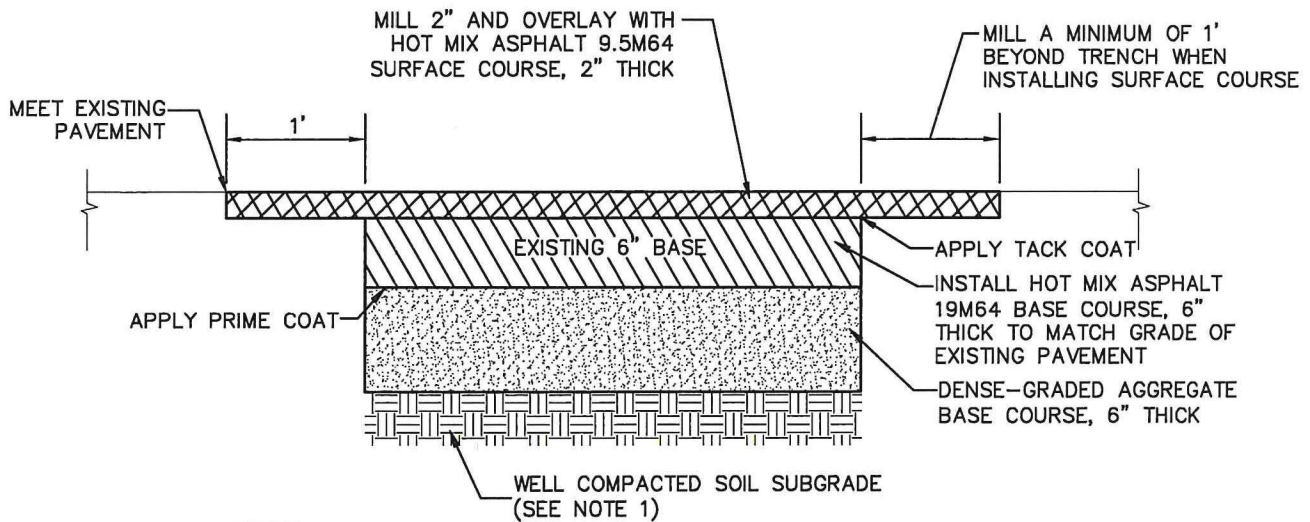

NOTES:

1. FILL BELOW PAVEMENT SUBBASE SHALL BE GRANULAR AND MEET NJDOT DESIGNATION I-13, AS NECESSARY TO OBTAIN PROPER COMPACTION.
2. INITIAL PLACEMENT OF 19M64 BASE COURSE SHALL BE 6" THICK AND MADE FLUSH WITH THE EXISTING PAVED SURFACE. FOLLOWING MILLING, THE FINAL BASE COURSE THICKNESS SHALL BE NO LESS THAN 4".
3. CONTRACTOR TO DELAY MILL AND OVERLAY FOR A MINIMUM OF FOUR (4) WEEKS TO ALLOW FOR ANY SETTLEMENT TO OCCUR.
4. LIMIT OF MILL AND OVERLAY SHALL BE ESTABLISHED AS PER ORDINANCE SECTION 328-6(f) & 328-6(g).

HOT MIX ASPHALT PAVEMENT RESTORATION FOR TRENCHES

N.T.S.